

Plate Mounting Tape: A good one mounts - the better one secures

tesa Softprint® Secure

The specially developed solution for print process productivity

Package printing in the 21st century has taken print results and production quality to new levels. Now the market will be challenged to maximize the efficiency of the production process, while keeping print results at the level that printers and clients have come to expect.

tesa Softprint® Secure – the ultimate solution to promote higher print process efficiency.

Equipped with a revolutionary adhesive system, tesa Softprint® Secure maintains consistent, original placement of plates and plate edges, regardless of cylinder, sleeve, or plate dimensions, press speed, or length of print run.

tesa Softprint® Secure stands for:

- optimal print results and result consistency
- the highest plate security on the market
- increased process productivity and output

Market standard




Testing has demonstrated that many tapes fail to secure plates over the duration of the print job, which can place limits on the print process.

tesa Softprint® Secure



Specially developed with the most demanding process parameters in mind, tesa Softprint® Secure takes edge security to a new level.

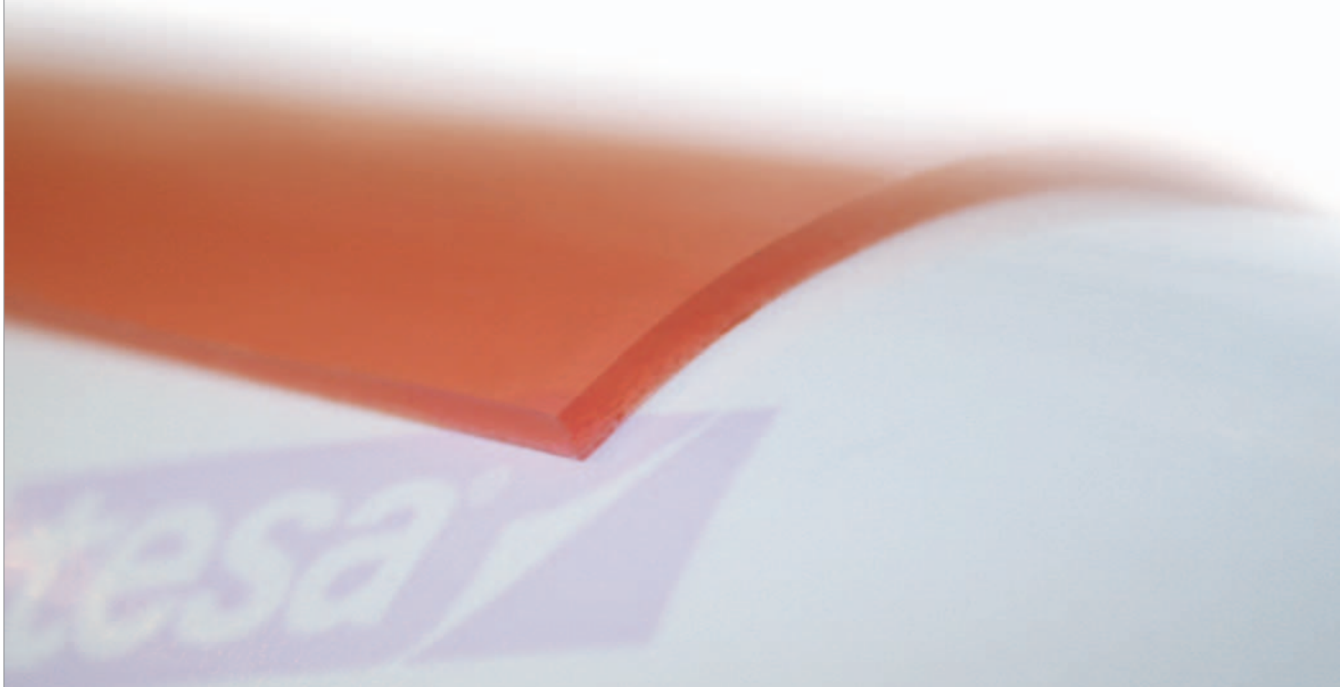

Overview of the benefits

	Explanation	Benefit
Specially designed "Secure" adhesive	<ul style="list-style-type: none"> Keeps plates mounted securely 	<ul style="list-style-type: none"> No press stops for remounting Easy demounting No primer needed – no residues No sealing tape necessary No damaged plates
tesa Softprint® foam	<ul style="list-style-type: none"> Polyethylene (PE) foam with closed, round cells 	<ul style="list-style-type: none"> Superior print results at highest speeds, even on longer jobs
tesa Service	<ul style="list-style-type: none"> Experts on site to give advice on upgrading processes 	<ul style="list-style-type: none"> Maximize machine potential

tesa® Softprint Secure 20 mil

Color Coding per foam hardness	Hard foam	Medium foam	Soft foam
tesa Softprint® Secure	52820	52821	52822
Thickness	20 mil		

Please ask your tesa® representative for more details.

tesa® products prove their impressive quality day in, day out in demanding conditions and are regularly subjected to strict controls. All information and recommendations are provided to the best of our knowledge on the basis of our practical experience. Nevertheless tesa SE can make no warranties, express or implied, including, but not limited to any implied warranty of merchantability or fitness for a particular purpose. Therefore, the user is responsible for determining whether the tesa® product is fit for a particular purpose and suitable for the user's method of application. If you are in any doubt, our technical support staff will be glad to advise you.